




# NVIDIA JETSON AGX XAVIER INDUSTRIAL

Designed to Perform.  
Built to Last.

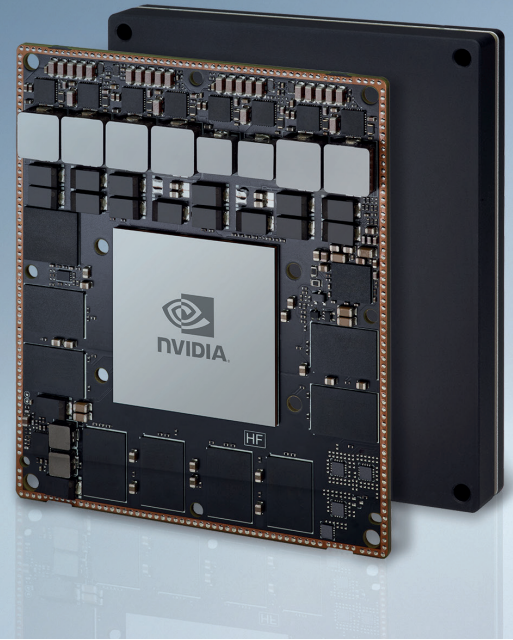

## Powering AI Embedded and Functional Safety Applications

NVIDIA® Jetson AGX Xavier™ Industrial delivers the highest performance for AI embedded industrial and functional safety applications in a power-efficient, rugged system-on-module. It's form-factor and pin-compatible with Jetson AGX Xavier, and has up to 20X the performance and 4X the memory of NVIDIA® Jetson™ TX2i. This lets you bring the latest AI models to your most demanding use cases.

Extended temperature, shock, and vibration specifications—plus new functional safety capabilities—make this Jetson module ideal for industrial-grade AI products. The module also includes hardware-verified secure boot, hardware-accelerated cryptography, support for encrypted storage and memory, and other security features to protect customer software.

NVIDIA JetPack™ SDK includes libraries, samples, and tools to accelerate the entire AI pipeline, and pretrained models from the NGC™ catalog are performance-optimized and ready to be fine-tuned with customer datasets. Support for cloud-native technologies enables seamless model and software updates throughout the module's 10-year operating lifetime.

The Jetson Safety Extension Package is available on request, with supporting software and documentation for customers who want to create IEC 61508 compliant products. A Safety design guide is also available with recommendations, guidelines, and ISO-13849 Cat. 2/3 PLd architecture examples as point of reference for customer safety designs.

Ease of development and speed of deployment—combined with form-factor, performance, and power advantage—make Jetson AGX Xavier Industrial the ideal rugged and safety-ready AI product platform.

## Key Features

### Module

- > 512-core NVIDIA Volta™ GPU with 64 Tensor cores
- > [2x] NVDLA
- > 8-core NVIDIA Carmel Arm®v8.2 64-bit CPU
- > 32GB 256-bit LPDDR4x (ECC Support)
- > 64GB eMMC 5.1
- > [2x] 7-way VLIW vision accelerator processor

### Power

- > Voltage input 5V, 9V~20V
- > Module Power: 20W - 40W

### Environment

- > Operating temperature: -40°C to 85°C measured on the TTP surface
- > Storage temperature: -40°C to 85°C
- > Non-operational humidity: 95% RH, -10°C to 65°C
- > Operational vibration: 5G RMS 10 to 500Hz, 3-axis, FCT (random/sinusoidal)
- > Non-operational vibration: 3G RMS 10 to 1000Hz, 3-axis, FCT (random)
- > Operational shock: 50G, half sine, 11ms
- > Non-operational shock: 140G, half sine, 2ms

# NVIDIA Jetson AGX Xavier Industrial

## TECHNICAL SPECIFICATIONS

AI Performance	<b>30 TOPS (INT8)</b>
GPU	<b>NVIDIA Volta architecture with 512 NVIDIA® CUDA® cores and 64 Tensor cores</b>
Max GPU Freq	<b>1.21 GHz</b>
CPU	<b>8-core NVIDIA Carmel Arm®v8.2 64-bit CPU 8MB L2 + 4MB L3</b>
CPU Max Freq	<b>2.03 GHz</b>
DL Accelerator	<b>2x NVDLA</b>
Vision Accelerator	<b>2x 7-Way VLIW vision processor</b>
Safety Cluster Engine	<b>2x ARM® Cortex®-R5 in lockstep</b>
Memory	<b>32GB 256-bit LPDDR4x (ECC Support) 136.5 GB/s</b>
Storage	<b>64GB eMMC 5.1</b>
Power	<b>20W   40W</b>
PCIe	<b>1 x8 + 1 x4 + 1 x2 + 2 x1 (PCIe Gen4, Root port and Endpoint)</b>
CSI Camera	<b>Up to 6 cameras (36 via virtual channels) 16 lanes MIPI CSI-2 D-PHY 1.2 (up to 40Gbps)   C-PHY 1.1 (up to 62Gbps)</b>
Video Encode	<b>2x4K60   6x4K30   12x1080p60   24x1080p30 (H.265&amp;H.264) 1x4K60   2x4K30   6x1080p60   14x1080p30 (VP9)</b>
Video Decode	<b>2x8K30   4x4K60   8x4K30   18x1080p60   36x1080p30 (H.265) 2x4K60   6x4K30   12x1080p60   24x1080p30 (H.264&amp;VP9)</b>
Display	<b>3 multi-mode DP 1.4/eDP 1.4/HDMI 2.0 a/b</b>
Networking	<b>10/100/1000 Base-T Ethernet</b>
USB	<b>3x USB 3.1 and 4x USB 2.0</b>
Other IOs	<b>5xUART/3xSPI/3xI2S/5xI2C/2xCAN/DMIC &amp; DSPK/GPIOs</b>
Mechanical	<b>100mm x 87mm 699-pin connector Integrated Thermal Transfer Plate</b>

To learn more about NVIDIA Jetson AGX Xavier, visit [www.pny.eu](http://www.pny.eu)

© 2021 NVIDIA Corporation. All rights reserved. NVIDIA, the NVIDIA logo, Jetson AGX, NVIDIA JetPack and NVIDIA Volta are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated. ARM, AMBA and ARM Powered are registered trademarks of ARM Limited. Cortex, MPCore and Mali are trademarks of ARM Limited. All other brands or product names are the property of their respective holders. "ARM" is used to represent ARM Holdings plc; its operating company ARM Limited; and the regional subsidiaries ARM Inc.; ARM KK; ARM Korea Limited.; ARM Taiwan Limited; ARM France SAS; ARM Consulting (Shanghai) Co. Ltd.; ARM Germany GmbH; ARM Embedded Technologies Pvt. Ltd.; ARM Norway, AS and ARM Sweden AB. All other trademarks are property of their respective owners. Features, pricing, availability, and specifications are all subject to change without notice. JUL21



PNY Technologies Europe  
9 rue Joseph Cugnot, 33708 Mérignac cedex | France  
T +33 (0) 5 56 13 75 75 | [pnypro@pny.eu](mailto:pnypro@pny.eu)

For more information visit: [www.pny.eu](http://www.pny.eu)